

# PRODUCT


## Green Building Materials Flooring Series

### EC-3000

Concentration load  
Depression / 3000N/m<sup>2</sup>

Concentration load Depression / 3000N/m<sup>2</sup>

- Central load depression under 4mm / 3,000N
- Loading property 3000N/m<sup>2</sup>
- Size: 500 x 500mm
- Panel Thickness: 23.5mm
- Weight: 5kg

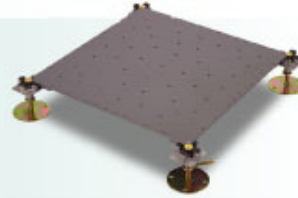


### EC-5000

Concentration load  
Depression / 5000N/m<sup>2</sup>

Concentration load Depression / 5000N/m<sup>2</sup>

- Central load depression under 4mm / 5,000N
- Loading property 5000N/m<sup>2</sup>
- Size: 500 x 500mm
- Panel Thickness: 24mm
- Weight: 6.4kg

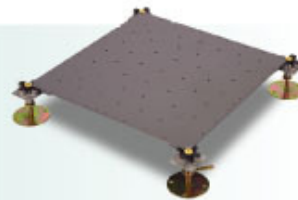

## Cable management Access Flooring Series

### FS-P63H

Concentration load  
Depression / 3000N/m<sup>2</sup>

Concentration load Depression / 3,000N/m<sup>2</sup>

- Central load depression under 2mm / 3,000N
- Loading property 3000N/m<sup>2</sup>
- Size: 600 x 600mm
- Panel Thickness: 33.5mm
- Weight: 14kg



### FS-P65H

Concentration load  
Depression / 5000N/m<sup>2</sup>

Concentration load Depression / 5,000N/m<sup>2</sup>

- Central load depression under 2mm / 5,000N
- Loading property 5000N/m<sup>2</sup>
- Size: 600 x 600mm
- Panel Thickness: 34.5mm
- Weight: 15kg



### FS-P66H

Concentration load  
Depression / 6000N/m<sup>2</sup>

Concentration load Depression / 6,000N/m<sup>2</sup>

- Central load depression under 2mm / 6,000N
- Loading property 6,000N/m<sup>2</sup>
- Size: 600 x 600mm
- Panel Thickness: 35mm
- Weight: 16.5kg




# FS P63H P65H P66H

Weld Steel skill plus Filler Cement  
More stronger



Main Panel

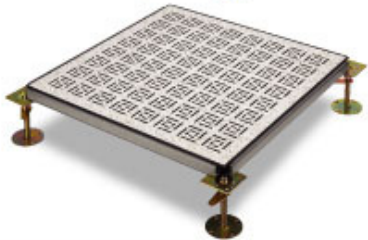

Air distribution Grilles

(Grille panels provide a range of options to suit floor load and air performance)

## Inside Panel



Main Panel




Grille Panel

- Antistatic
- Anti-seismic, corrosion proof.
- Quiet and Comfort: Steel alloy panels stuffed with light cement have features of sound insulation, making less echo against foot traffic.
- Suitable place: information centers, automated offices, computer rooms, etc



Fixed Support

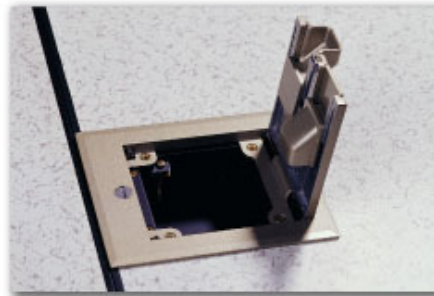


Outlet Unit

We offer general finishing materials (surfacing materials of high pressure layered boards (HPL), conductive floor tiles, PVC floor tiles), as well as carpet tiles, veneer and marble stones similar tiles to match different sites.



PVC Coverings      HPL Coverings      Static Conductive Coverings

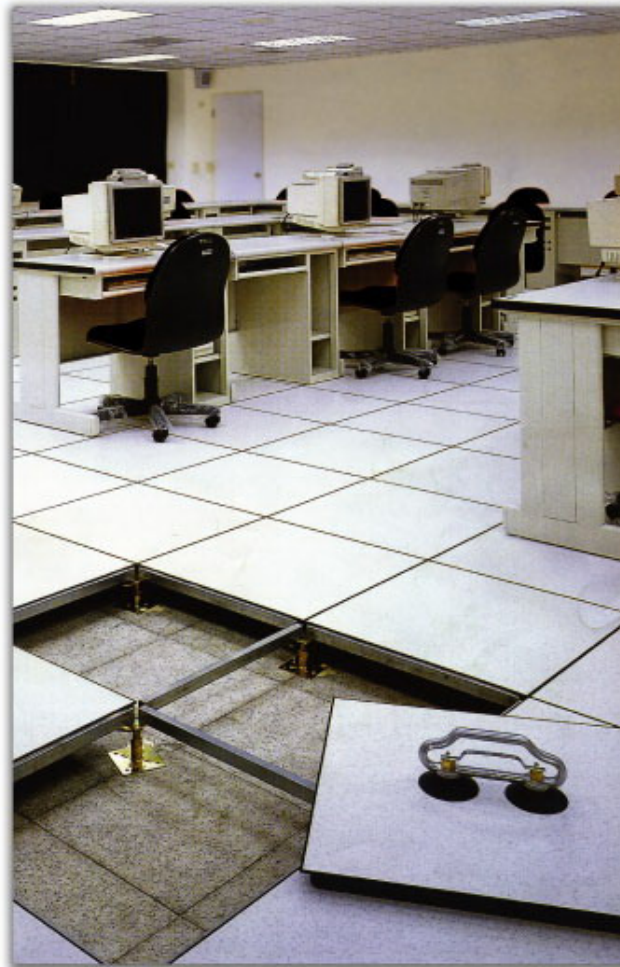

#### Shockproof Metal Alloy Elevated Flooring FS-P63H / FS-P65H / FS-P66H

Dimension	600 x 600 x 33.5mm / 600 x 600 x 34.5mm / 600 x 600 x 35mm
Material	Steel material by China Steel Corp. + hydrochloric phosphata membrane coating + static powder lamination
Filler	Ultra high-strength lightweight cement
Weight	FS-P63H: 14kg/pc; FS-P65H: 15kg/pc; FS-P66H: 16kg/pc
Weight load type	Maximum destruction load of 900kgs and higher under CNS-300kgf, within 2.0mm depression
	Maximum destruction load of 1500kgs and higher under CNS-500kgf, within 2.0mm depression
	Maximum destruction load of 1800kgs and higher under CNS-600kgf, within 2.0mm depression
Shockproof design	One-point mounting that holds down four boards; with shockproof index raised at 1G
Surface material	Rear affixed implementation method; square carpets, vinyl floor tiles, quartz glossy tiles, etc